



The 950 represents a new generation of gas fires for Rinnai. Designed to meet the highest expectations in terms of simple installation, powerful heat output, energy efficiency and flueing flexibility, the 950 is the future of fire.

This gas log fire offers a mix of modern frames and burn media options, giving you the ultimate flexibility to create a space that is your own. The classic 'cut wood' look of the Australian Eucalyptus Log Set provides a beautiful dancing flame, whilst the glowing Pebbles radiate warmth with a modern twist.

- > High 5.5 star energy efficiency rating*
- > Heat output up to 8.1kW, perfect for open plan living areas[†]
- > Thermostatically controlled
- > Flexible power flueing
- > Remote control included as standard.

*When installed using extended flue. †When using short flue.

950 | Gas Log Fire

Design Options



Stainless Steel on Black with Pebbles




Black on Black with Australian Eucalyptus Logs





Flueing Options

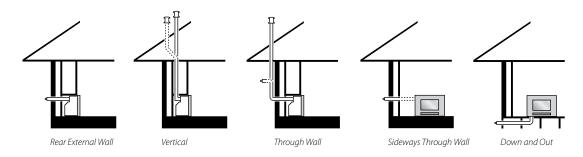

Installation Options

Whether you are building a new home, working through a major renovation or just want to revamp your living room, the Rinnai zero clearance option is the perfect solution to creating a new space.

If your home doesn't have an existing fireplace, creating a false fireplace is the next best thing. To ensure an easy installation into a timber frame or other combustible materials, the Rinnai 1250, 950, 752 and Symmetry are designed with an integrated zero clearance box.

The Sapphire and Slimfire can be installed with the purchase of an additional zero clearance box.

Creating a False Fireplace



For an alternative installation to a false fireplace, the Rinnai 1250 & 950 can be installed into a weatherproof box. A cavity is cut into the existing blank wall and the fireplace is installed onto a bracket that allows the back of the fire to sit outside housed in a tightly sealed box. This option allows the fire to be built into an existing wall without taking up any extra space in the room. The weatherproof box is sold separately.

Gas Log Flame Fire Specifications		Slimfire 252	Sapphire	Symmetry	752	950	1250		
Style		Inbuilt	Freestanding / Inbuilt	Inbuilt	Inbuilt	Inbuilt	Inbuilt		
Visual Dimensions (mm)	Н	645	660	643	710	660	660		
	W	750	865	1110	1050	1070	1320		
	D	70	62	14	100	25	25		
Inbuilt Cavity Dimensions (mm)	Н	550-630	660*	850	660	570	570		
	W	595-700	695*	1100 - 1125	860	965	1265		
	D	Min. 360	370*	Min. 600	450	570	570		
Gas Types		NG/LPG							
Gas Input MJ/h	Low	7.7	14	19	8	10	10		
	High	25	30	33	31.5	34	34		
kW Output		5	6.97	7.6	6.97	8.13	8.4		
Heats Up to Capacity (m²)	Very Cold	42	60	64	58	69	69		
	Cold	50	70	76	69	82	82		
	Cool	68	95	103	94	110	110		
	Mild	77	108	117	107	125	125		
AS4553 Efficiency Star Rating		2.8	4.2	4.2	4.1	5	5.2-5.5**		
Thermostatic or Manual Control		Manual 3 Settings	Manual / Optional Remote Thermostat	Thermostatic	Thermostatic	Thermostatic	Thermostatic		
Dual Timers				N/A	Yes	Yes	Yes		
Multiple Timers			Only w/ remote	Yes	N/A	N/A	N/A		
Preheat Feature		N/A			Yes	Yes	Yes		
Auto Off Mode			Yes	Yes	Yes	Yes	Yes		
Override Button					Yes	Yes	Yes		
Flame Function			Yes	Yes	Yes	Yes	Yes		
Child Lock or Lock Button					Yes	Yes	Yes		

^{*}Masonry fireplace dimensions only, see Rinnai website for further details **Star rating depends on flueing configuration

Warranty	Heat Exchanger	Fan	All Other Parts	Free Labour		
Domestic Use	10 years pro rata ⁽¹⁾	2 years	1 year	1 year		
Commercial Use	1 year on all parts and labour					

Please note: For full definitions of Domestic and Commercial use, along with other conditions and exclusions, please refer to **www.rinnai.com.au** (1) Full replacement cost in the 1st year, reducing 10% per year thereafter. 240V power is required on all models. Mandatory dress guards are not shown for illustrative purposes.

